

CANT HOOKS

Made from the highest quality materials, Dixie cant hooks are used to move, roll, slide or float logs or poles into position. With the blunt end up against a log or pole, the hook grabs it at a second location. Once engaged, the handle gives the operator leverage to reposition it. These tools are great for right-of-way clearing and for positioning utility poles.

FEATURES & BENEFITS

HIGH-QUALITY MATERIALS AND CRAFTSMANSHIP


Handles are made from top-quality, straight-grain white mountain hickory hardwood, kiln dried to 18% moisture content, then precision cut to an exact fit.

DURABLE STEEL COMPONENTS

Duckbill hooks are drop forged with the bills ground to a fine point. Clasps and extension toe rings are ductile iron castings for long-lasting service.

REPLACEMENT PARTS AVAILABLE

Replacement handles, duckbill hooks, extension toe rings and clasps are available.

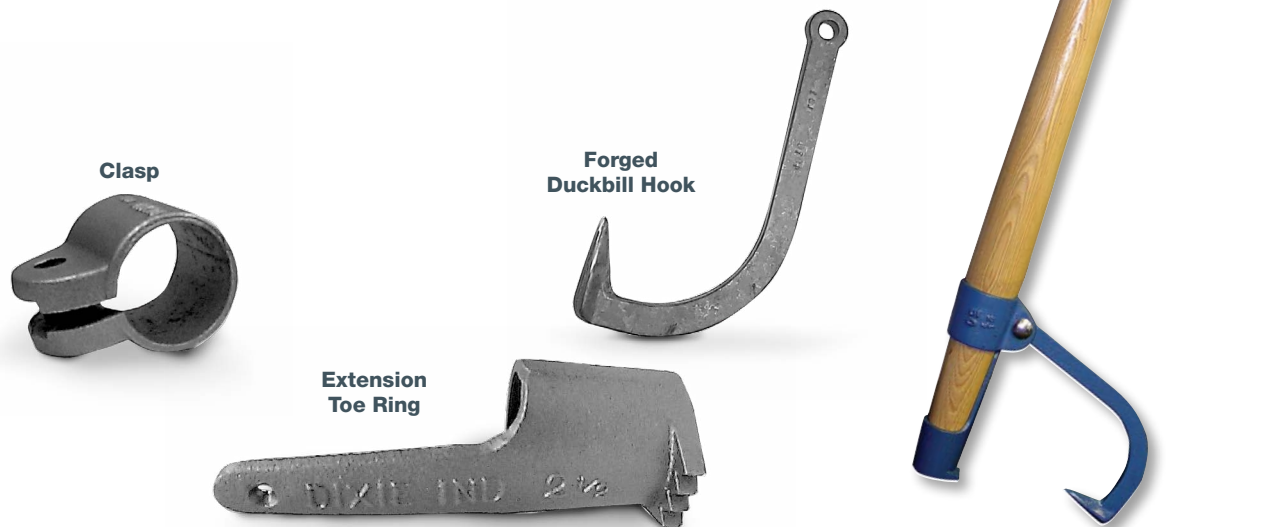

SPECIFICATIONS

Item #	For Log Sizes (in.)	Total Weight (lbs.)	Replacement Handle item #	Handle Dia. (in.)	Handle Length (ft.)	Handle Weight (lbs.)	Duckbill Hook #	Duckbill Hook Length (in.)
Hickory Handle								
06100	6 to 16	4.6	06102	2-1/4	2	2.0	24010	7/16 x 7/8 x 8
06110	6 to 16	6.0	06112	2-1/4	2-1/2	3.0	24010	7/16 x 7/8 x 8
06120	6 to 16	6.4	06122	2-1/4	3	3.5	24010	7/16 x 7/8 x 8
06130	6 to 16	7.0	06132	2-1/4	3-1/2	3.8	24010	7/16 x 7/8 x 8
06140	6 to 16	8.3	06142	2-1/4	4	4.0	24010	7/16 x 7/8 x 8
06240	6 to 16	10.1	06242	2-1/2	4	5.0	24010	7/16 x 7/8 x 8
06250	8 to 24	11.7	06252	2-1/2	4-1/2	5.5	24230	1/2 x 1 x 9
06260	8 to 24	13.5	06262	2-1/2	5	6.0	24230	1/2 x 1 x 9

Dixie Industries cant hooks can be built to customer specifications upon request.